

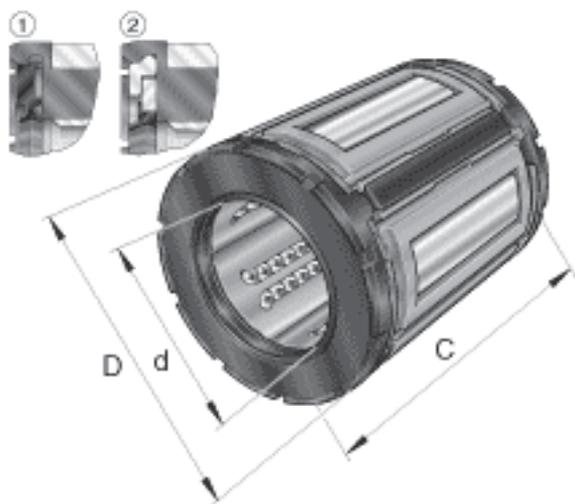
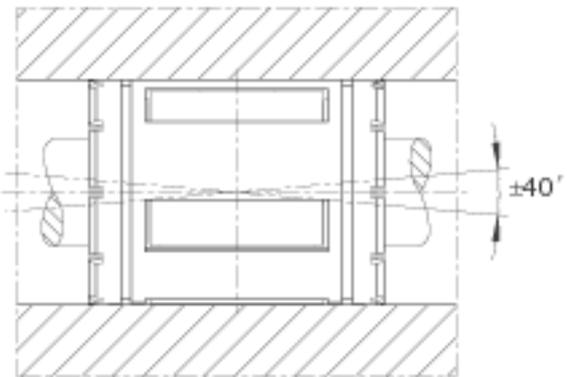


INA KX08-PP参数

| | | | | |
|--------|-------|---------|------|---|
| 基本额定载荷 | C | 1223 | N | 基本额定载荷仅适用于淬硬 (670+170 HV) 及磨削过的作为滚道的轴 基本额定载荷根据 ISO/CD 14 728-1 (最小值) |
| | C_0 | 890 | N | 基本额定载荷仅适用于淬硬 (670+170 HV) 及磨削过的作为滚道的轴 基本额定载荷根据 ISO/CD 14 728-1 (最小值) |
| 尺寸 | d | 12.7 | mm | 轴的直径 |
| | D | 22.225 | mm | - |
| | C | 31.75 | mm | - |
| 说明 | | | | 六排球 |
| 尺寸 | C_1 | 26.2128 | mm | - |
| | C_7 | 1.1684 | mm | - |
| | d_1 | 20.8534 | mm | - |
| 重量 | m | 0.034 | lbs. | 质量 |

INA KX08-PP图片

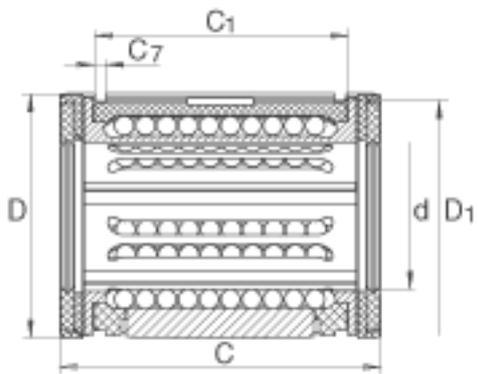

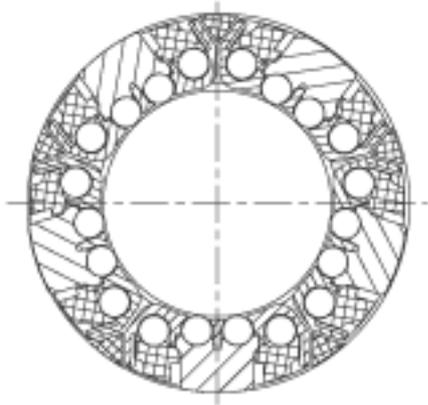

参考资料:<http://www.sozhou.com/p/fd0725af.html>